Basic J-T Rigging Screw- J-T Rigging Screw

Centre of Pin - Centre of Pin

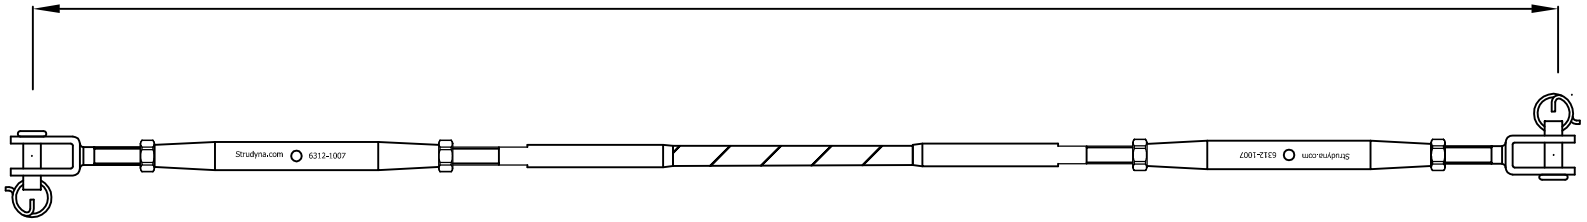

Part no: _____

Part no: _____

Qty of Cables	Length =X

ARCUS WIRE GROUP
MARINE • INDUSTRIAL • ARCHITECTURAL

		Customer		Customer sign.			General Tolerance	
							>0.5 ....6 mm	± 0.1
Wire diameter							> 6 ... 30 mm	± 0.2
							>30 ...120 mm	± 0.3
							>120 ..400 mm	± 0.5
Wire construction		Material		DRAWING BY	CHECKED BY	APPROVED BY	Scale Standard Tolerance	C DIN.
Pin Diameter		Date		.....	.....	...../...../.....	UNIT OF MM	