


Turnbuckle - Shroud Terminal

Centre of Pin - Bearing Surface

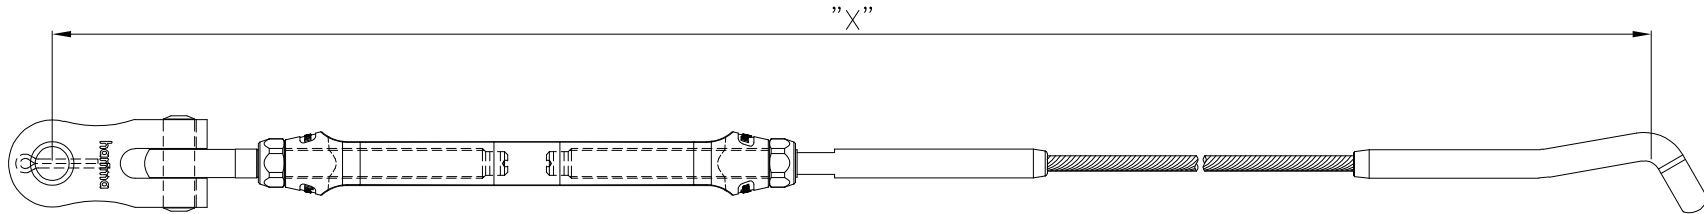

Part no : _____

Part no : _____

Qty of Cables

Length = X

| | |
|--|--|
| | |
| | |
| | |
| | |
| | |
| | |



| | | Customer | | | Customer sign. | | General tolerance | |
|-------------------|--|----------|--|-----------|----------------|-------------|--------------------|------|
| | | | | | | | | |
| Wire diameter | | | | | | | >0.5.....6 mm. | ±0.1 |
| Wire construction | | Material | | DRAWNG BY | CHECKED BY | APPROVED BY | >630 mm. | ±0.2 |
| Pin diameter | | Date | | | | | >30.....120 mm. | ±0.3 |
| | | | | | | | >120...400 mm. | ±0.5 |
| | | | | | | | Scale | C |
| | | | | | | | Standard tolerance | DIN |
| | | | | | | | UNIT OF MM | |