


Turnbuckle - Stem Ball

Centre of Pin - Bearing Surface

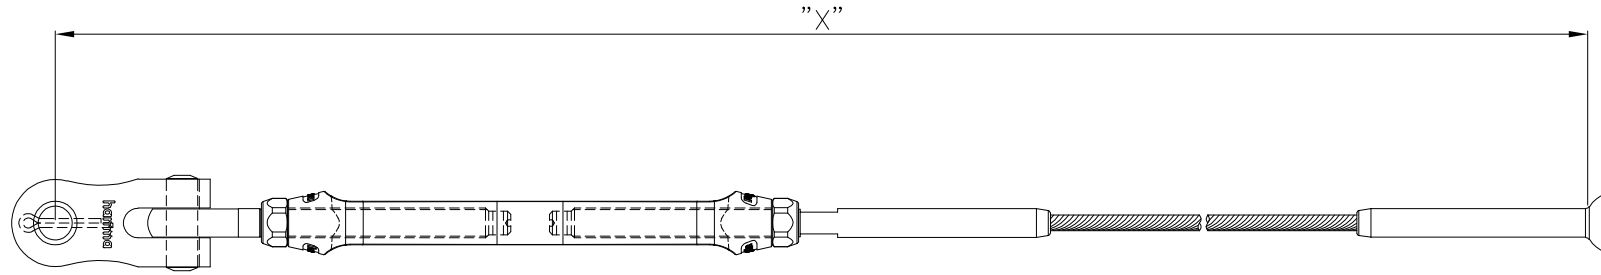

Part no : _____

Part no : _____

Qty of Cables

Length = X

		Customer			Customer sign.		General tolerance	
							>0.5.....6 mm.	±0.1
							>630 mm.	±0.2
							>30.....120 mm.	±0.3
							>120...400 mm.	±0.5
Wire diameter		Material		DRAWNG BY	CHECKED BY	APPROVED BY	Scale	C
Wire construction		Date					Standard tolerance	DIN
Pin diameter							UNIT OF MM	

